
# SPF SERIES

PCB MOUNT SOLID STATE RELAYS

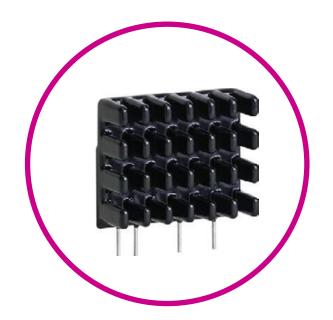

# Features

- SIP SSR
- Ratings to 25A (forced air) @ 480 VAC
- SCR output for heavy industrial loads
- Zero turn-on (resistive loads) or instantaneous turn-on (inductive loads) output

•

Sensata

**Technologies** 

• DC Control

## **PRODUCT SELECTION**

Control Voltage	240 VAC	480 VAC
3-15 VDC	SPF240D25	
4-15 VDC		SPF480D25
15-32 VDC	SPFE240D25	SPFE480D25

## SPECIFICATIONS

## Output 👊

Description	SPF(E)240	SPF(E)480	
Operating Voltage (47-63Hz) [Vrms]	12-280	48-660	
Transient Overvoltage [Vpk]	600	1200	
Maximum Off-State Leakage Current @ Rated Voltage [mArms]	0.1	0.1	
Minimum Off-State dv/dt @ Maximum Rated Voltage [V/µsec) <sup>(2)</sup>	500	500	
Maximum Load Current (Convection Air) [Arms] (3)	10		
Minimum Load Current (Forced air) [mArms] <sup>(3)</sup>	25	25	
Minimum Load Current [mArms]	0.06	0.06	
Maximum Surge Current (16.6msec) [Apk]	250	250	
Maximum On-State Voltage Drop @ Rated Current [Vpk]	1.6	1.6	
Maximum I <sup>2</sup> t for Fusing (8.3msec) [A <sup>2</sup> sec]	260	260	
Minimum Power Factor (at Maximum load)	0.5	0.5	

# Input 😐


Description	SPF240D25	SPF480D25	SPFExxxD25
Control Voltage Range	3-15 VDC	4-15 VDC	15-32 VDC
Maximum Turn-on Voltage	3.0 VDC	4.0 VDC	15 VDC
Minimum Turn-Off Voltage	1.0 VDC	1.0 VDC	1.0 VDC
Typical Input Current @ Nominal Voltage	15 mA	15 mA	15 mA
Nominal Input Impedance	300 Ohm	240 Ohm	1500 Ohm
Maximum Turn-On Time [msec] (4)	1/2 Cycle	1/2 Cycle	1/2 Cycle
Maximum Turn-Off Time [msec] 40	1/2 Cycle	1/2 Cycle	1/2 Cycle

# General 😐

Description	Parameters
Dielectric Strength, Input/Output (50/60Hz)	4000 Vrms
Minimum Insulation Resistance (@ 500 VDC)	10 <sup>9</sup> Ohms
Maximum Capacitance, Input/Output	8 pF
Ambient Operating Temperature Range	-30 to 80 °C
Ambient Storage Temperature Range	-30 to 125 °C
Weight (typical)	0.85 oz. (25 g)
Encapsulation	Thermally conductive epoxy




# WIRING DIAGRAM

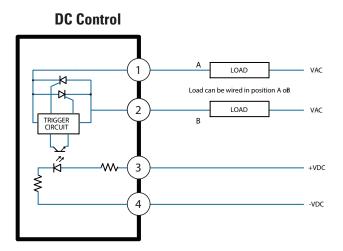



Tolerances: ±0.02 in / 0.5 mm All dimensions are in millimeters [inches]

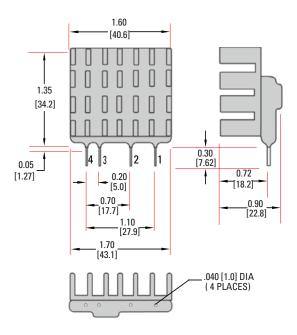

THERMAL DERATE INFORMATION

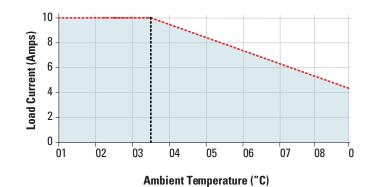
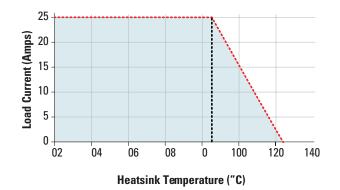


Figure 1 Convection Cooling



**Figure 2 Forced Air Cooling** 

		ONC
	ERING	UN3

Series	SPF	E T	240	D	 R	
Control Voltage						
Blank: 3-15 VDC (for 240) 4-15 VDC (for 480) E: 15-32 VDC						
Load Voltage 240: 12-280 VAC 480: 48-660 VAC						
Control Input Type D: DC Input						
Operational Current						
<b>25:</b> 5 Amps						
Switching Type ——						
Blank: Zero Voltage Turn-( R: Instantaneous Turn-On	Dn					Required for valid part number For options only and not required for valid part number



<sup>(1)</sup>All parameters at 25 °C unless otherwise specified

<sup>(2)</sup> Off-State dv/dt test method per EIA/NARM standard RS-443. paragraph 13.11.1

<sup>(3)</sup> Heatsink temperature 85°C Maximum

(4) Turn-On Time for Instantaneous Turn-on versions 0.1 msec (DC Control Models)

# AGENCY APPROVALS & CERTIFICATIONS

Designed in accordance with the requirements of IEC 62314







### RISK OF MATERIAL DAMAGE AND HOT ENCLOSURE

• The product's side panels may be hot, allow the product to cool before touching

- Follow proper mounting instructions including torque values
- · Do not allow liquids or foreign objects to enter this product

Failure to follow these instructions can result in serious injury, or equipment damage.



### HAZARD OF ELECTRIC SHOCK, EXPLOSION OR ARC FLASH

- Disconnect all power before installing or working with this equipment
- Verify all connections and replace all covers before turning on power

Failure to follow these instructions will result in death or serious injury.

Page 5

**CONTACT US** 

+44 (1202) 416170

Asia Pacific

ext 2808

ssr-info.eu@sensata.com

China +86 (21) 2306 1500

Japan +81 (45) 277 7117

Korea +82 (31) 601 2004

India +91 (80) 67920890

+1 (877) 502 5500 - Option 2

sales.crydom@sensata.com

Europe, Middle East & Africa

sales.isasia@list.sensata.com

Rest of Asia +886 (2) 27602006

Americas

Sensata Technologies, Inc. ("Sensata") data sheets are solely intended to assist designers ("Buyers") who are developing systems that incorporate Sensata products (also referred to herein as "components"). Buyer understands and agrees that Buyer remains responsible for using its independent analysis, evaluation and judgment in designing Buyer's systems and products. Sensata data sheets have been created using standard laboratory conditions and engineering practices. Sensata has not conducted any testing other than that specifically described in the published documentation for a particular data sheet. Sensata may make corrections, enhancements, improvements and other changes to its data sheets or components without notice.

Buyers are authorized to use Sensata data sheets with the Sensata component(s) identified in each particular data sheet. HOWEVER, NO OTHER LICENSE, EXPRESS OR IMPLIED, BY ESTOPPEL OR OTHERWISE TO ANY OTHER SENSATA INTELLECTUAL PROPERTY RIGHT, AND NO LICENSE TO ANY THIRD PARTY TECHNOLOGY OR INTELLECTUAL PROPERTY RIGHT, IS GRANTED HEREIN. SENSATA DATA SHEETS ARE PROVIDED "AS IS". SENSATA MAKES NO WARRANTIES OR REPRESENTATIONS WITH REGARD TO THE DATA SHEETS OR USE OF THE DATA SHEETS, EXPRESS, IMPLIED OR STATUTORY, INCLUDING ACCURACY OR COMPLETENESS. SENSATA DISCLAIMS ANY WARRANTY OF TITLE AND ANY IMPLIED WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, QUIET ENJOYMENT, QUIET POSSESSION, AND NON-INFRINGEMENT OF ANY THIRD PARTY INTELLECTUAL PROPERTY RIGHTS WITH REGARD TO SENSATA DATA SHEETS OR USE THEROF.

All products are sold subject to Sensata's terms and conditions of sale supplied at www.sensata.com SENSATA ASSUMES NO LIABILITY FOR APPLICATIONS ASSISTANCE OR THE DESIGN OF BUYERS' PRODUCTS. BUYER ACKNOWLEDGES AND AGREES THAT IT IS SOLELY RESPONSIBLE FOR COMPLIANCE WITH ALL LEGAL, REGULATORY AND SAFETY-RELATED REQUIREMENTS CONCERNING ITS PRODUCTS, AND ANY USE OF SENSATA COMPONENTS IN ITS APPLICATIONS, NOTWITHSTANDING ANY APPLICATIONS-RELATED INFORMATION OR SUPPORT THAT MAY BE PROVIDED BY SENSATA.

Mailing Address: Sensata Technologies, Inc., 529 Pleasant Street, Attleboro, MA 02703, USA.

#### www.sensata.com